




NINGBO EASY LIFTING AUTO ACCESSORIES CO., LTD.

MANUFACTURER

OF RATCHET STRAPS AND WEBBING SLINGS

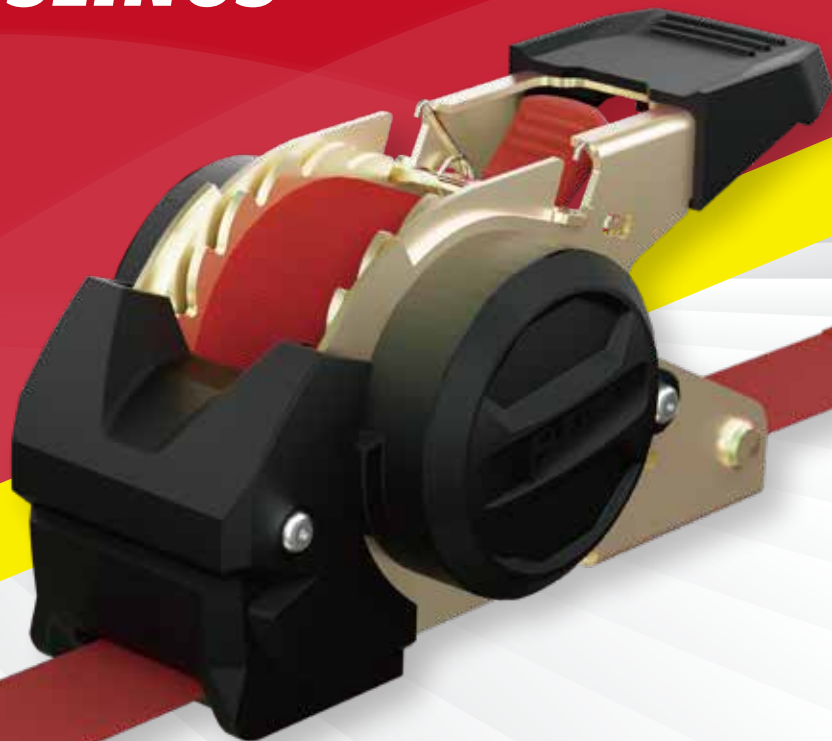


■ ABOUT US

Ningbo Easy Lifting Auto Accessories Co., Ltd. is a professional lashing equipment manufacturer in China. We specialize in stainless steel center buckles, ratchet tie-down series, cam buckles, hooks and webbing slings and are committed to improving safety and security in the cargo control industry. We have a well-equipped infrastructure unit with multiple high-level infrastructure facilities. The unit is operated by a team of engineers and other professionals who strictly inspect and supervise at all stages of manufacturing and production. Our lashing equipment complies with relevant GS and CE standards. We also customize our product range as per the needs and specifications of our customers. With the philosophy of continuous improvement in service levels and product quality, EasyLifting's dedicated export department is fully familiar with global shipping and documentation requirements, making EasyLifting products easily available by direct purchase from any country.



RATCHET TIE DOWNS






YLAR2501



YLAR5001





YLAR2501

AUTOMATIC RATCHET TIE DOWNS

Width	25mm
Material	Steel
Webbing Break Strength	600kg
End Fitting	YLEF01/YLEF02/YLEF03/YLEF04/YLEF05 YLEF06/YLEF07/YLEF08/YLEF09
Strap Type	Retractable Ratchet
Length	3.5m

YLAR5001

AUTOMATIC RATCHET TIE DOWNS

Width	50mm
Material	Steel
Webbing Break Strength	2000kg
End Fitting	YLEF01/YLEF02/YLEF03/YLEF04/YLEF05 YLEF06/YLEF07/YLEF08/YLEF09
Strap Type	Retractable Ratchet
Length	4.5m



YLEF01



YLEF02



YLEF03



YLEF04



YLEF05



YLEF06



YLEF07



YLEF08



YLEF09



YL025001A	
Width	25mm
BS	500kg/800kg



YL025001B	
Width	25mm
BS	500kg/800kg



YL025002A	
Width	25mm
BS	500kg/800kg



YL025002B	
Width	25mm
BS	500kg/800kg



YL025003	
Width	25mm
BS	500kg/800kg



YL025004A	
Width	25mm
BS	500kg/800kg




YL025004B	
Width	25mm
BS	500kg/800kg



YL025004C	
Width	25mm
BS	500kg/800kg



YL025005	
Width	25mm
BS	500kg/800kg



YL025006	
Width	25mm
BS	500kg/800kg



YL025007	
Width	25mm
BS	500kg/800kg



YL025008	
Width	25mm
BS	500kg/800kg



YL025009A	
Width	25mm
BS	1500kg



YL025009B	
Width	25mm
BS	1500kg



YL025009C	
Width	25mm
BS	1500kg



YL025010A	
Width	25mm
BS	1500kg



YL025010B	
Width	25mm
BS	1500kg





YL035001A	
Width	35mm
BS	2000kg



YL035001B	
Width	35mm
BS	2000kg



YL035001C	
Width	35mm
BS	2000kg



YL035001D	
Width	35mm
BS	2000kg



YL035006	
Width	35mm
BS	2000kg



YL035007	
Width	35mm
BS	3000kg




YL035008A	
Width	35mm
BS	2000kg



YL035008B	
Width	35mm
BS	2000kg



YL035009	
Width	38mm
BS	2000kg



YL035010A	
Width	38mm
BS	2000kg



YL035010B	
Width	38mm
BS	2000kg



YL035010C	
Width	38mm
BS	2000kg



YL035011	
Width	38mm
BS	3000kg



YL038013	
Width	38mm
BS	2000kg



YL035015A	
Width	38mm
BS	2000kg



YL035015B	
Width	38mm
BS	2000kg





YL050001A	
Width	50mm
BS	2000kg



YL050001B	
Width	50mm
BS	2000kg



YL050001C	
Width	50mm
BS	2000kg



YL050002	
Width	50mm
BS	5000kg



YL050003	
Width	50mm
BS	5000kg



YL050004	
Width	50mm
BS	2000kg




YL050005A	
Width	50mm
BS	5000kg



YL050005B	
Width	50mm
BS	5000kg



YL050005C	
Width	50mm
BS	5000kg



YL050005D	
Width	50mm
BS	5000kg



YL050005E	
Width	50mm
BS	5000kg



YL050006A	
Width	50mm
BS	5000kg



YL050006B	
Width	50mm
BS	5000kg



YL050006C	
Width	50mm
BS	5000kg



YL050007	
Width	50mm
BS	5000kg



YL050008	
Width	50mm
BS	5000kg



YL050009	
Width	50mm
BS	5000kg



YL050010	
Width	50mm
BS	5000kg



YL050011	
Width	50mm
BS	5000kg



YL050012	
Width	50mm
BS	5000kg



YL050013	
Width	50mm
BS	5000kg



YL050014A	
Width	50mm
BS	5000kg



YL050014B	
Width	50mm
BS	5000kg




YL050014C	
Width	50mm
BS	5000kg



YL07501/YL10001	
Width	75mm/100mm
BS	8T/10T





YLS02501	
Width	25mm
BS	800kg



YLS02502	
Width	25mm
BS	800kg



YLS02503	
Width	38mm
BS	2000kg



YLS02504	
Width	25mm
BS	500kg/800kg



YLS02505	
Width	25mm
BS	500kg/800kg



YLS02506	
Width	25mm
BS	500kg/800kg



YLS04001	
Width	40mm
BS	2000kg



YLS05001	
Width	50mm
BS	2000kg



YLS05002	
Width	50mm
BS	2000kg

LASHING STRAPS




YLCM001A

Width	25mm
BS	250kg



YLCM001B

Width	25mm
BS	250kg



YLCM001C	
Width	25mm
BS	250kg/500kg



YLCM002	
Width	25mm
BS	500kg



YLCM003	
Width	50mm
BS	1100kg



YLCM004	
Width	25mm
BS	700kg



YLCM005	
Width	40mm
BS	600kg/900kg



YLCM006	
Width	35mm
BS	600kg



YLCM007	
Width	50mm
BS	700kg



YLCM008	
Width	50mm
BS	1200kg



YLCM009	
Width	50mm
BS	800kg

E-TRACK SYSTEMS




YLE05001	
Width	50mm
BS	2000kg



YLE05002	
Width	50mm
BS	2000kg



YLE05003	
Width	50mm
BS	2000kg



YLE05004	
Width	50mm
BS	2000kg



YLET001



YLET002



YLTf001



YLTf002



YLTf003



YLTf004



YLTf005



YLTf006

CORNER PROTECTOR




CPT001	
Width	4in
Weight	85g



CPT002	
Width	4in
Weight	52g



CPT002C	
Width	4in
Weight	52g



CPT003	
Width	6in
Weight	160g



CPT004	
Width	12in
Weight	420g



CPT005	
Width	24in
Weight	965g



CPT006	
Width	2in
Weight	21g



CPT007	
Width	6in
Weight	144g



CPT008	
Width	6in
Weight	170.5g



CPT009	
Width	1in
Weight	17.5g



CPT010	
Width	48in
Weight	2040g



CPT011	
Width	36in
Weight	1532g

POLYESTER FLAT WEBBING SLINGS

Specification: RE-useable webbing slings manufactured in accordance with BS 3481 Pt.2 1983 F:S 7:1 (re-useable), DIN-EN 1492-1 and the essential requirements of the European Machinery Directive. Color coded and stripped for WLL(working load limit) identification. Manufactured from 100% high tenacity continuous filament polyester fibre. All webbing slings are individually numbered and are fully traceable. Every single webbing sling is labeled and certificated in accordance with the relevant standard together with information about safety use and maintenance.

Available: Simplex, duplex & quadruplex ply standard slings, single and double endless slings, twin sling etc. In standard and long length up to 300mm width. With flat or becket (folded) eyes with or without re-inforcement. Label printed with customer logo on request.



Webbing Width(mm)	Load capacity (colour)	Working Load Limit with 1 webbing sling					Working Load Limit with 2 webbing sling			
		Straight lift	Choked lift	β			Straight lift up to 45°	Choked lift up to 45°	Straight lift 45°-60°	Choked lift 45°-60°
				0°-7°	7°-45°	45°-60°				
		1.0	0.8	2.0	1.4	1.0	1.4	1.12	1.0	0.8
30	WLL1T	1.000	8.00	2.000	1.400	1.000	1.400	1.120	1.000	800
60	WLL2T	2.000	1.600	4.000	2.800	2.000	2.800	2.240	2.000	1.600
90	WLL3T	3.000	2.400	6.000	4.200	3.000	4.200	3.360	3.000	2.400
120	WLL4T	4.000	3.200	8.000	5.600	4.000	5.600	4.480	4.000	3.200
150	WLL5T	5.000	4.000	10.000	7.000	5.000	7.000	5.600	5.000	4.000
180	WLL6T	6.000	4.800	12.000	8.400	6.000	8.400	6.720	6.000	4.800
240	WLL8T	8.000	6.400	16.000	11.200	8.000	11.200	8.960	8.000	6.400
300	WLL10T	10.000	8.000	20.000	14.000	10.000	14.000	11.200	10.000	8.000

lifting eye types		physical information chart	
	1.flat eye		polyester
	2.Reversed eye	Elongation at breaking force	ca.12%
	3.Folded eye 1/2 width from 1 side	Elongation at WLL	ca.3%
	4.Folded eye 1/2 width from 2 side	Elongation -resistance in wet condition	100%
	5.Folded eye 1/3 width	Compared wear-resistance	80
		Specific weight	1.38

FLIFTING ROUND SLINGS

Specification: Manufactured in accordance with BS 6668 Pt.2 1987, DIN-EN 1492-2 and essential requirements of European Machinery Directive. The load bearing core of a round sling is manufactured from 100% high tenacity continuous filament polyester fibre which is protected by an abrasion resistance tubular polyester webbing cover. Color coded and striped for WLL0/Working Load Limit) identification. All round slings are individually numbered and are fully traceable. Every single round sling is labeled and certificated in accordance with relevant standard together with information about safety use and maintenance.

Available: In lengths up to 18 meter working (36m circumference). Capacity up to 20 ton WLL(Working Load Limit) per sling. Label printed with customer logo on request.

	Webbing width(mm) single ply	Load capacity (colour)	Working Load Limit with 1 round sling							Working Load Limit with 2 round sling			
			Straight lift	Choked lift	β					Straight lift up to 45°	Choked lift up to 45°	Straight lift up to 45°-60°	Choked lift up to 45°-60°
					0°-7°	7°-45°	45°-60°	up to 45°	45°-60°				
													
			1.0	0.8	2.0	1.4	1.0	1.7	0.5	1.4	1.12	1.0	0.8
	30	WLL1T	1.000	800	2.000	1.400	1.000	700	500	1.400	1.120	1.000	800
	60	WLL2T	2.000	1.000	4.000	2.800	2.000	1.400	1.000	2.800	2.240	2.000	1.000
	90	WLL3T	3.000	2.400	6.000	4.200	3.000	2.100	1.500	4.200	3.360	3.000	2.400
	120	WLL4T	4.000	3.200	8.000	5.600	4.000	2.800	2.000	5.600	4.480	4.000	3.200
	150	WLL5T	5.000	4.000	10.000	7.000	5.000	3.500	2.500	7.000	5.600	5.000	4.000
	180	WLL6T	6.000	4.800	12.000	8.400	6.000	4.200	3.000	8.400	6.700	6.000	4.800
	240	WLL8T	8.000	6.400	16.000	11.200	8.000	5.600	4.000	11.200	8.960	8.000	6.400
	300	WLL10T	10.000	8.000	20.000	14.000	10.000	5.600	4.000	14.000	11.200	10.000	8.000

The Number of Endless Webbing, Items Number, Working Loading Limited								
Items Number	As an Example Safety Factor 6:1 Width(mm)	W.LL(t)	Safety working load					
			Vertical	Choker	Basket Loading			
					$\alpha < 7^\circ$	$7^\circ < \alpha < 45^\circ$	$45^\circ < \alpha < 60^\circ$	
								
			M=1	M=0.8	M=2	M=1.4	M=1	
SP010	25/38	1	1	0.8	2	1.4	1	
SP020	50	2	2	1.6	4	2.8	2	
SP030	75	3	3	2.4	6	4.2	3	
SP040	100	4	4	3.2	8	5.6	4	
SP050	125	5	5	4.0	10	7.0	5	
SP060	150	6	6	4.8	12	8.4	6	
SP080	200	8	8	6.4	16	11.2	8	
SP100	250	10	10	8.0	20	14.0	10	
DP030	25/38	2	2	1.6	4	2.8	2	
DP040	50	4	4	3.2	8	5.6	4	
DP060	75	6	6	4.8	12	8.4	6	
DP080	100	8	8	6.4	16	11.2	8	
DP100	125	10	10	8.0	20	14.0	10	
DP120	150	12	12	9.6	24	16.8	12	
DP160	200	16	16	12.8	32	22.4	16	
DP200	250	20	20	16.0	40	28.0	20	
DP240	300	24	24	19.2	48	33.6	24	



 WWW.NBEASYLIFTING.COM  SALES@NBEASYLIFTING.COM
NINGBO EASY LIFTING AUTO ACCESSORIES CO., LTD.